

Robert Chandelier

LC1069, LC1076, LC1083 1.0

GENERATION LIGHTING

Chandelier


GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

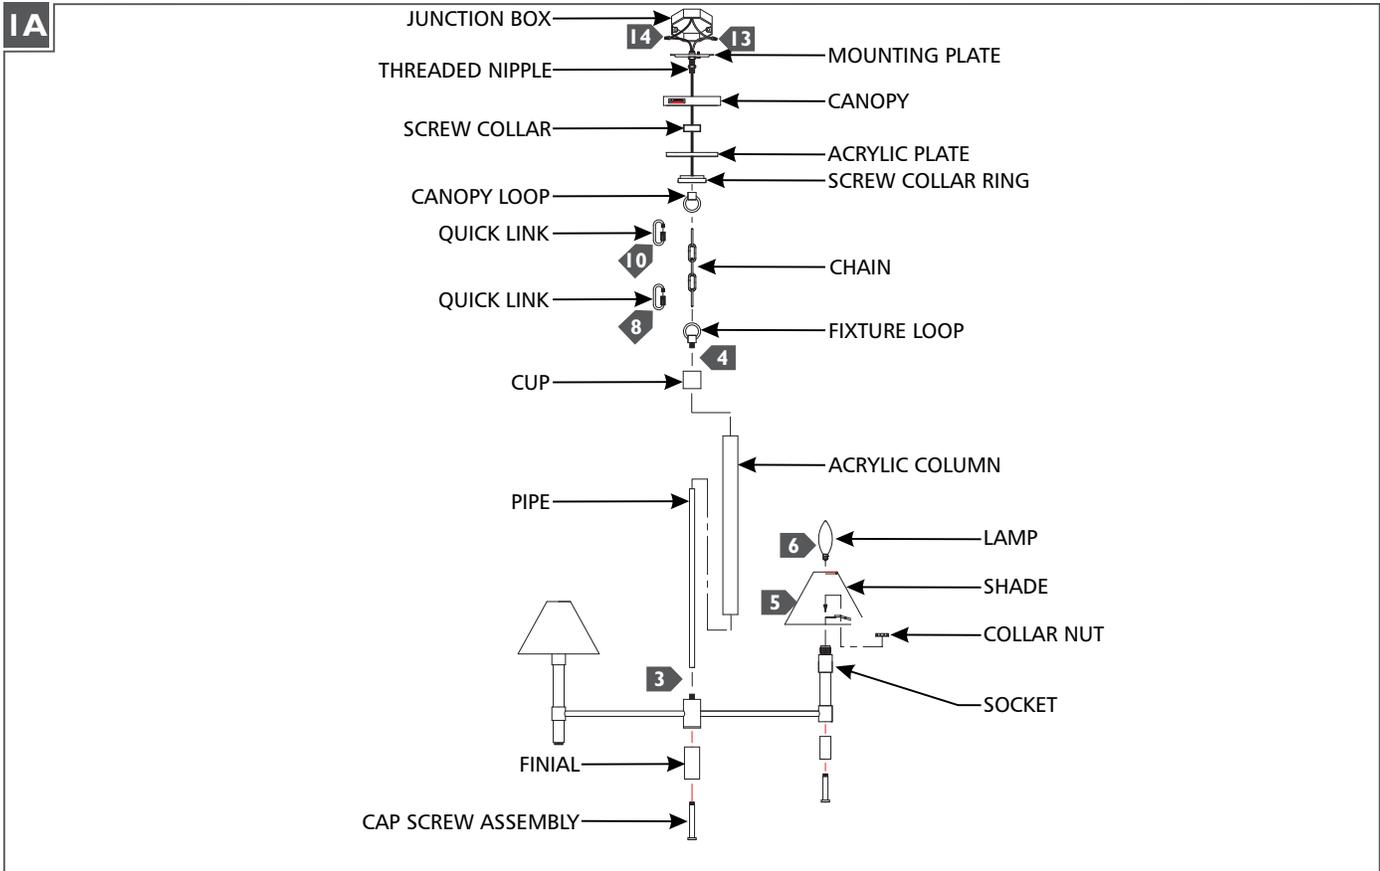

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate, then screw the screw collar and canopy loop onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Feed the cord through the pipe, then screw the pipe onto the fixture.
- 4** Feed the cord through the acrylic column, cup, and fixture loop, then secure them in place by screwing the fixture loop onto the pipe.
- 5** Place the shade over the socket and secure it in place by screwing the collar nut onto the socket. Repeat for remaining shades.
- 6** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 7** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 8** Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 9** Install the screw collar ring, acrylic plate, and canopy onto the chain (in that order).
- 10** Install the quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 11** Weave the cord through the chain, screw collar ring, acrylic plate, canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 12** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 13** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 14** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 15** Neatly place all the wires into the junction box, place the canopy, acrylic plate onto the mounting plate, and secure them in place by screwing the screw collar ring tightly onto the threaded nipple.
- 16** Install the finials to the bottom of the fixture using the cap screw assemblies.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.